

SMD Power Inductor CDH25D14



Under Development



Halogen
Free



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 2.6 × 2.1 × 1.5 mm Max.
- Product weight: 0.03 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging


Applications

- Ideally used in Mobile Phone, PDA, MP3, DSC/ DVC, HDD, etc as DC-DC converter inductors.


Dimension - [mm]

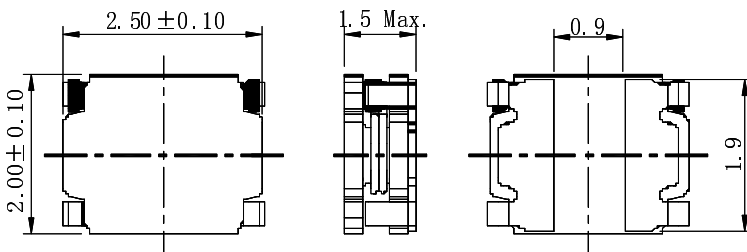

Land pattern and Schematics - [mm]

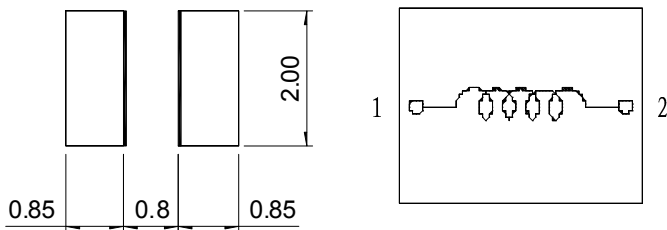

SMD Power Inductor CDH25D14

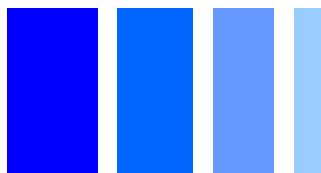

Under Development


Electrical Characteristics

Part name	Stamp	Inductance [μ H] 1MHz	D.C.R. (Ω) [Max.] (Typ.) (at 20°C)	Saturation current (A) ※1		Temperature rise current (A) ※2
				(at 20°C)	(at 105°C)	
CDH25D14HF-R24NC	A	0.24 \pm 30%	0.050(0.035)	4.15(5.20)	3.30(4.10)	2.20(2.50)
CDH25D14HF-R33NC	B	0.33 \pm 30%	0.060(0.045)	3.40(4.25)	2.85(3.55)	1.90(2.20)
CDH25D14HF-R47NC	C	0.47 \pm 30%	0.065(0.055)	3.05(3.80)	2.55(3.20)	1.70(1.95)
CDH25D14HF-R68NC	D	0.68 \pm 30%	0.075(0.060)	2.70(3.40)	2.20(2.75)	1.55(1.80)
CDH25D14HF-R82NC	E	0.82 \pm 30%	0.085(0.070)	2.50(3.10)	2.10(2.60)	1.50(1.70)
CDH25D14HF-1R0NC	F	1.0 \pm 30%	0.095(0.075)	2.25(2.80)	1.85(2.30)	1.45(1.65)
CDH25D14HF-1R5NC	G	1.5 \pm 30%	0.13(0.10)	1.85(2.30)	1.50(1.90)	1.15(1.30)
CDH25D14HF-2R2MC	J	2.2 \pm 20%	0.18(0.14)	1.50(1.90)	1.25(1.55)	0.95(1.10)
CDH25D14HF-3R3MC	K	3.3 \pm 20%	0.21(0.17)	1.30(1.60)	1.05(1.30)	0.75(0.90)
CDH25D14HF-4R7MC	L	4.7 \pm 20%	0.30(0.24)	1.10(1.40)	0.90(1.15)	0.65(0.75)
CDH25D14HF-6R8MC	M	6.8 \pm 20%	0.52(0.42)	0.90(1.15)	0.75(0.90)	0.55(0.60)
CDH25D14HF-100MC	N	10 \pm 20%	0.67(0.53)	0.75(0.95)	0.60(0.75)	0.40(0.50)
CDH25D14HF-150MC	P	15 \pm 20%	1.05(0.83)	0.60(0.75)	0.50(0.65)	0.35(0.40)
CDH25D14HF-220MC	Q	22 \pm 20%	1.55(1.30)	0.50(0.60)	0.40(0.50)	0.27(0.32)
CDH25D14HF-330MC	R	33 \pm 20%	2.15(1.70)	0.40(0.50)	0.30(0.40)	0.13(0.27)

※1. Saturation current: The value of D.C. current when the inductance decreases to 70% of its nominal value.

※2. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).


SMD Power Inductor CDH25D14




Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

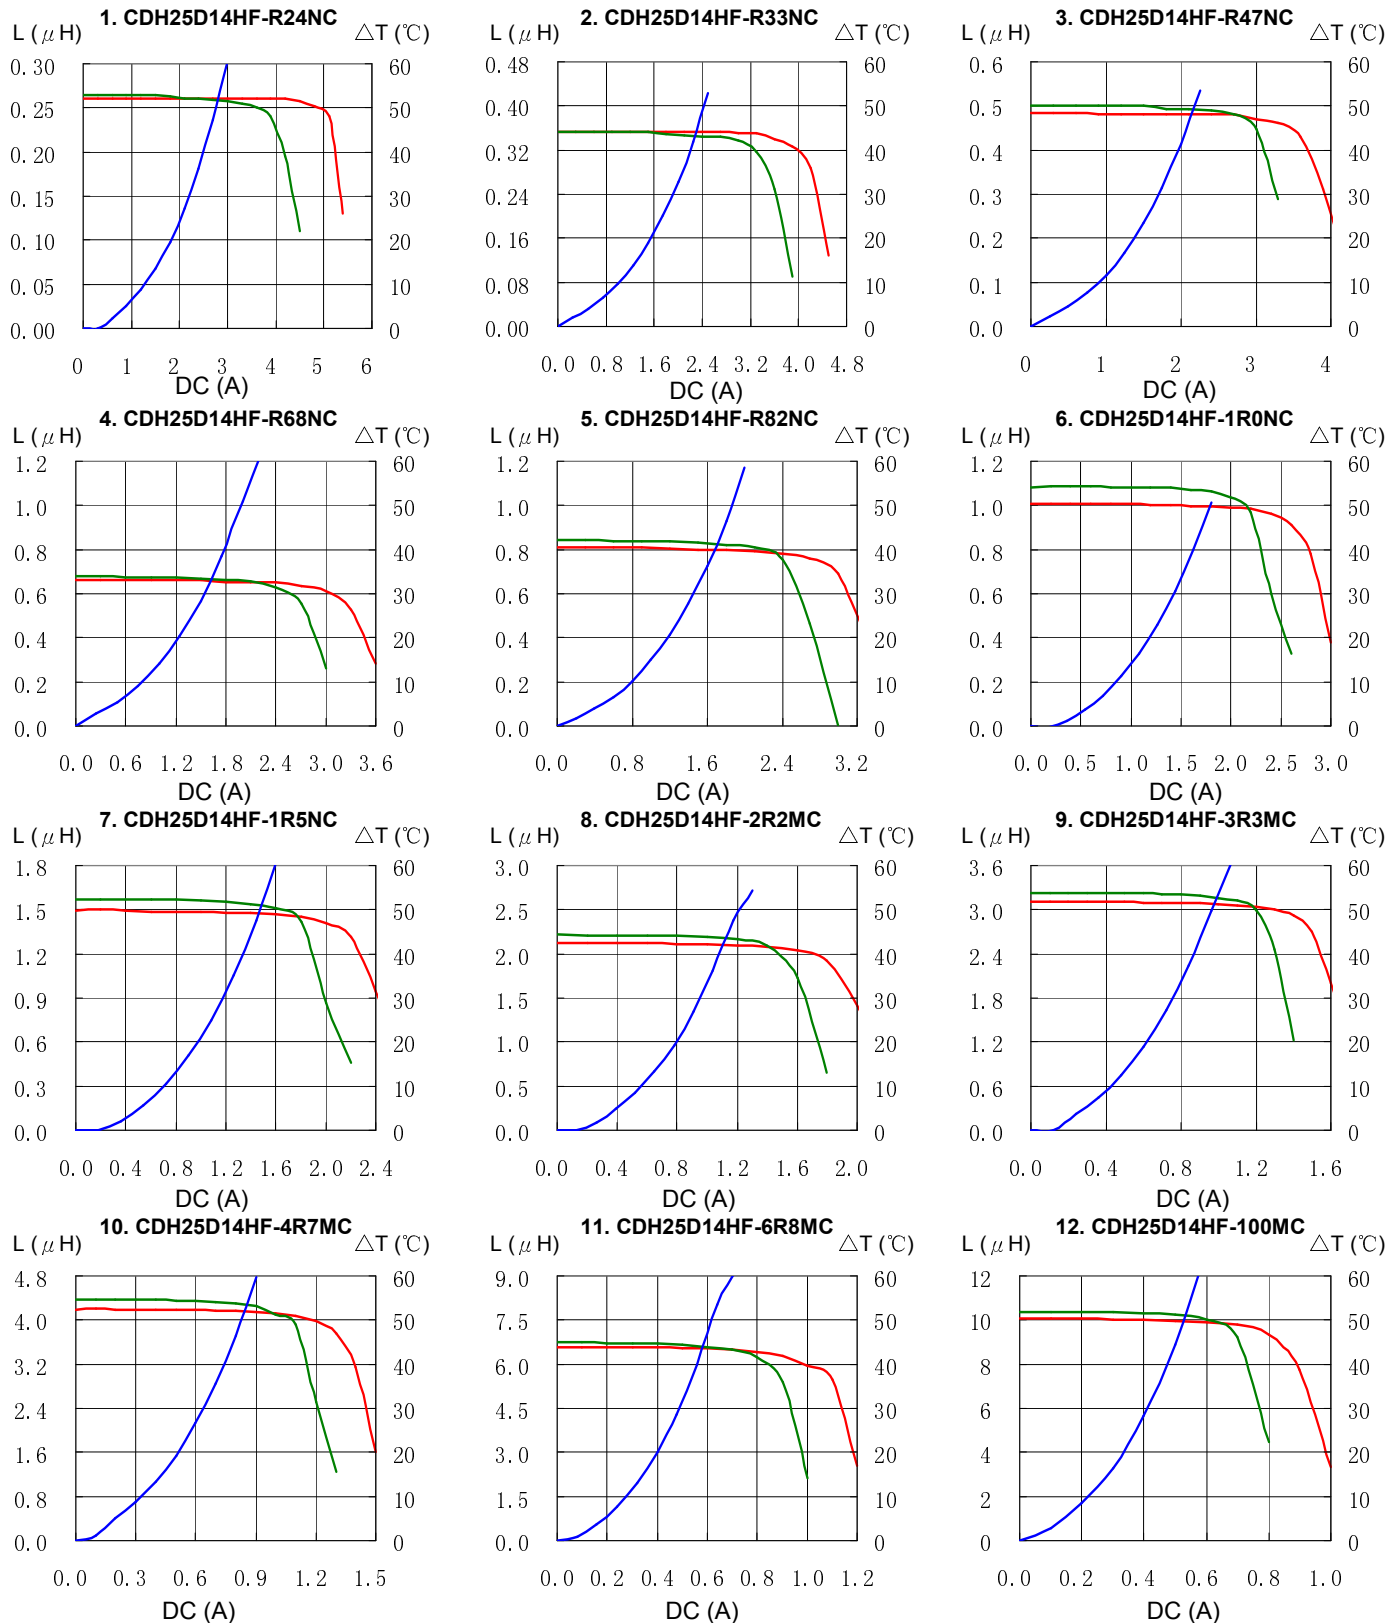




SMD Power Inductor CDH25D14

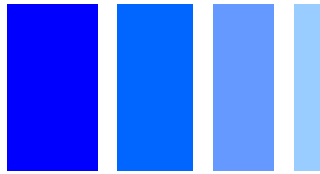



Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

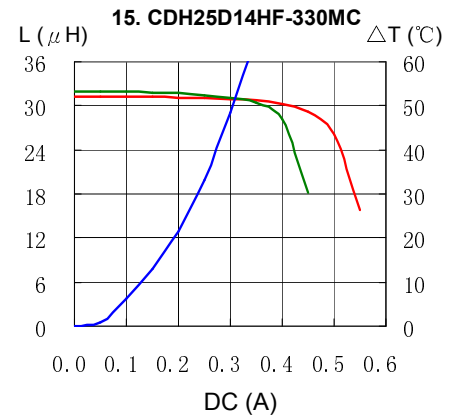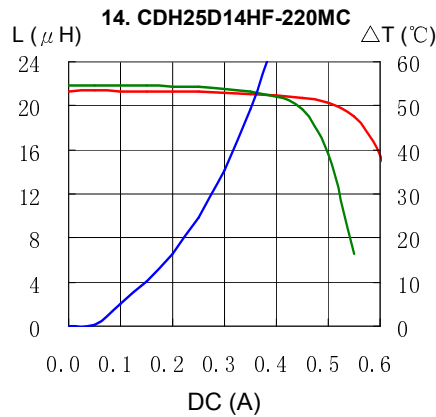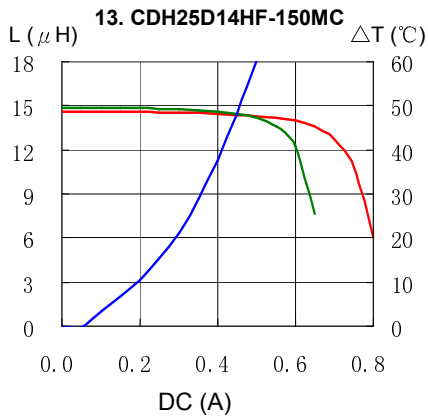

Solder Reflow Condition

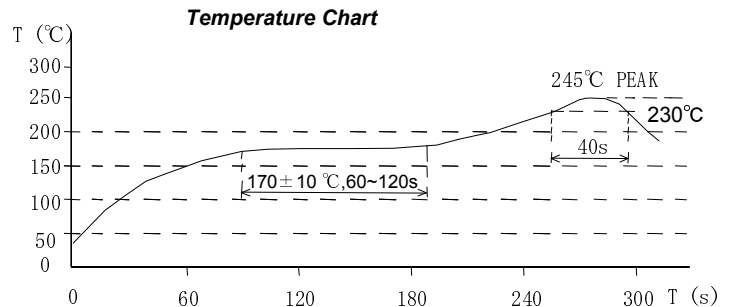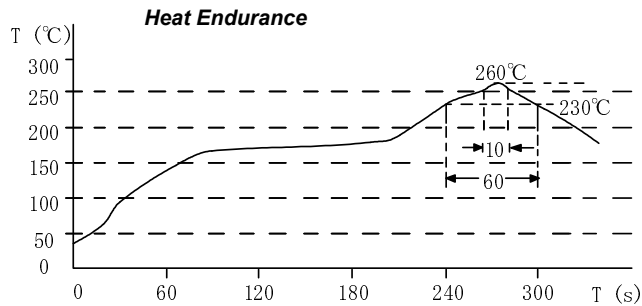

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6688
FAX.+852-2565-9600
sales@hk.sumida.com

Tokyo
Tel.+81-3-5202-7112
FAX.+81-3-5202-7105
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-021-5836-3299
FAX.+86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6296-3390
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-3219660
FAX.+1-408-321-9308
sales@us.sumida.com