

# SMD Power Inductor CDRH10D48/A



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.5 × 5.0 mm Max.
- Product weight: 1.8 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Qualification to AEC-Q200.

## Environmental Data

- Operating temperature range: -40°C~+125°C (excluding coil's self temperature rise)
- Storage temperature range: -40°C~+85°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 11.8" diameter reel
- 500pcs per reel


## Applications

- Automotive and other high temperature, high reliability application.

## Dimension - [mm]

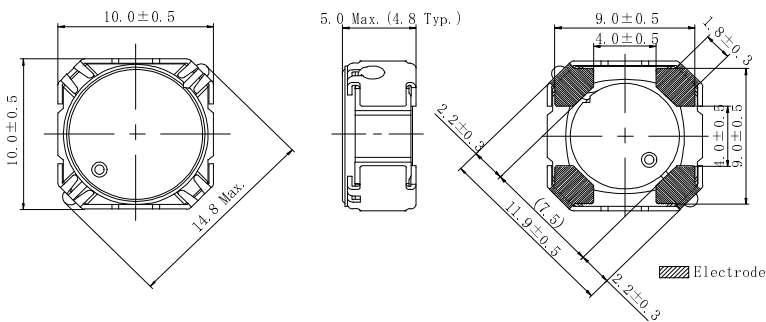

## Land pattern and Schematics - [mm]

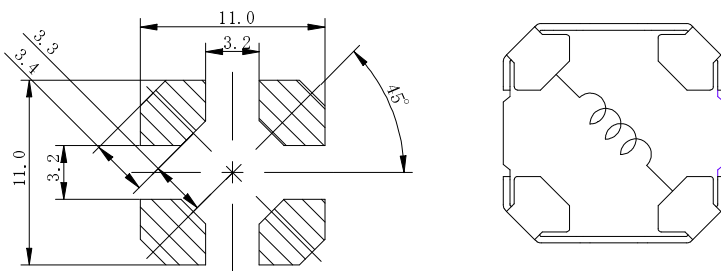

# SMD Power Inductor

## CDRH10D48/A



### Electrical Characteristics

Part No.	Stamp	Inductance [ $\mu$ H] [within] ※1	D.C.R. (m $\Omega$ ) [Max.] (Typ.) (at 20°C)	Rated current (A) ※2
CDRH10D48/ANP-2R4MC	2R4	2.4 $\mu$ H $\pm$ 20%	12(9)	5.2
CDRH10D48/ANP-3R4MC	3R4	3.4 $\mu$ H $\pm$ 20%	13(10)	4.8
CDRH10D48/ANP-4R3MC	4R3	4.3 $\mu$ H $\pm$ 20%	15(12)	4.3
CDRH10D48/ANP-5R8MC	5R8	5.8 $\mu$ H $\pm$ 20%	24(19)	3.8
CDRH10D48/ANP-7R2MC	7R2	7.2 $\mu$ H $\pm$ 20%	29(23)	2.9
CDRH10D48/ANP-8R7MC	8R7	8.7 $\mu$ H $\pm$ 20%	37(29)	2.7
CDRH10D48/ANP-100MC	100	10 $\mu$ H $\pm$ 20%	40(32)	2.6
CDRH10D48/ANP-120MC	120	12 $\mu$ H $\pm$ 20%	44(35)	2.5
CDRH10D48/ANP-150MC	150	15 $\mu$ H $\pm$ 20%	49(39)	2.3
CDRH10D48/ANP-180MC	180	18 $\mu$ H $\pm$ 20%	62(49)	2.2
CDRH10D48/ANP-220MC	220	22 $\mu$ H $\pm$ 20%	70(56)	1.9
CDRH10D48/ANP-270MC	270	27 $\mu$ H $\pm$ 20%	90(72)	1.7
CDRH10D48/ANP-330MC	330	33 $\mu$ H $\pm$ 20%	113(90)	1.5
CDRH10D48/ANP-390MC	390	39 $\mu$ H $\pm$ 20%	127(101)	1.4
CDRH10D48/ANP-470MC	470	47 $\mu$ H $\pm$ 20%	138(110)	1.3
CDRH10D48/ANP-560MC	560	56 $\mu$ H $\pm$ 20%	172(137)	1.2
CDRH10D48/ANP-680MC	680	68 $\mu$ H $\pm$ 20%	209(167)	1.1
CDRH10D48/ANP-820MC	820	82 $\mu$ H $\pm$ 20%	268(214)	0.97
CDRH10D48/ANP-101MC	101	100 $\mu$ H $\pm$ 20%	294(235)	0.92
CDRH10D48/ANP-121MC	121	120 $\mu$ H $\pm$ 20%	374(299)	0.82
CDRH10D48/ANP-151MC	151	150 $\mu$ H $\pm$ 20%	437(349)	0.77
CDRH10D48/ANP-181MC	181	180 $\mu$ H $\pm$ 20%	558(446)	0.65
CDRH10D48/ANP-221MC	221	220 $\mu$ H $\pm$ 20%	637(509)	0.61
CDRH10D48/ANP-271MC	271	270 $\mu$ H $\pm$ 20%	839(671)	0.53
CDRH10D48/ANP-331MC	331	330 $\mu$ H $\pm$ 20%	938(750)	0.49

※1. Measuring condition: at 100 kHz.













※2 The value of current when the inductance decrease to 65% of it's nominal value or DC current when  $\Delta T=30^{\circ}\text{C}$  whichever is lower. ( $T_a=125^{\circ}\text{C}$ )

# SMD Power Inductor CDRH10D48/A



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) —  $\Delta T$

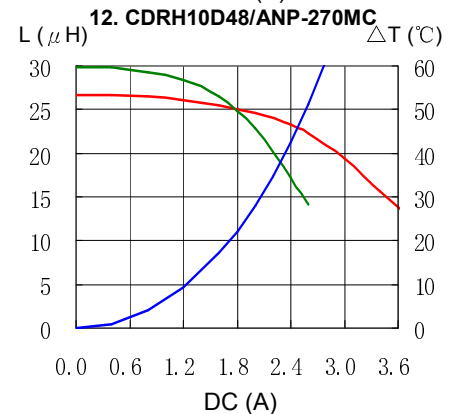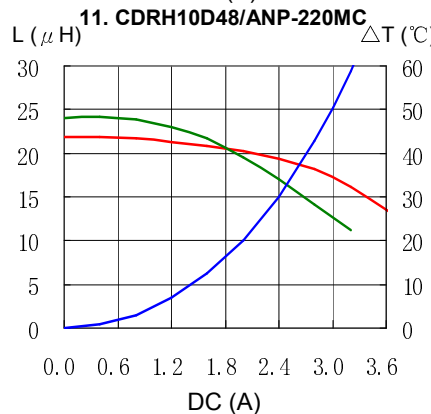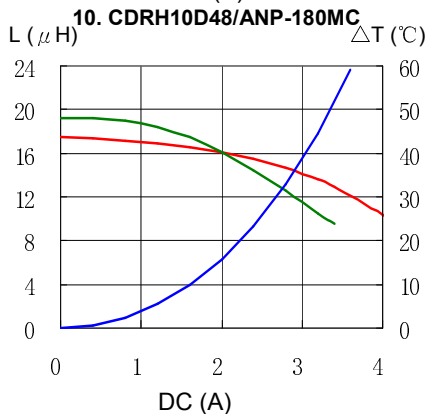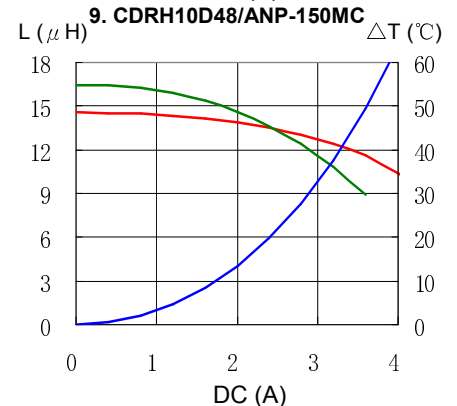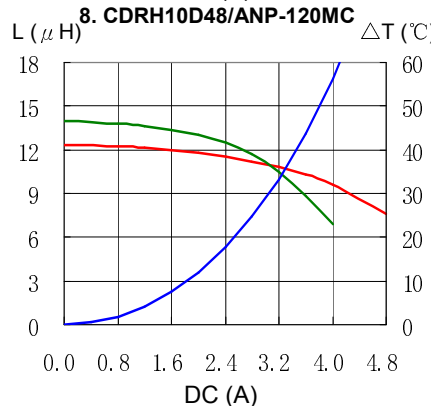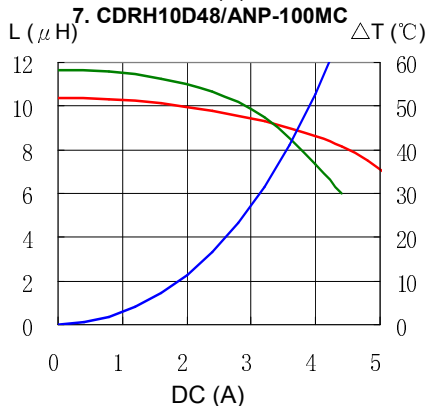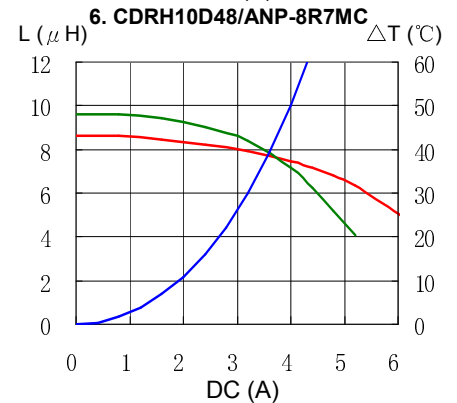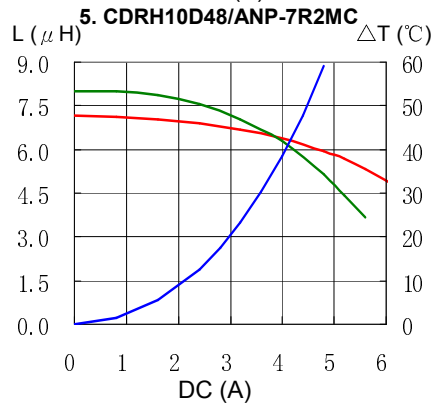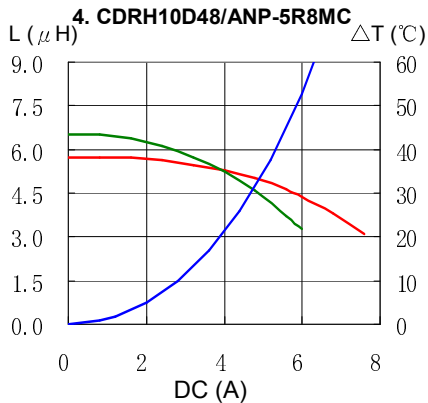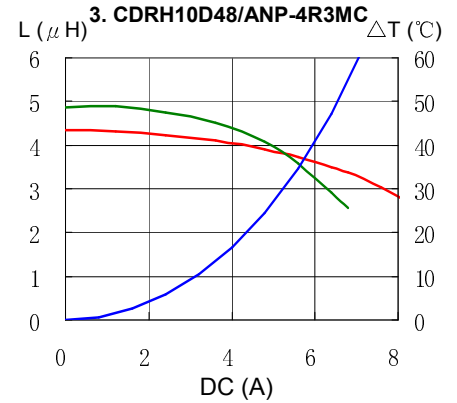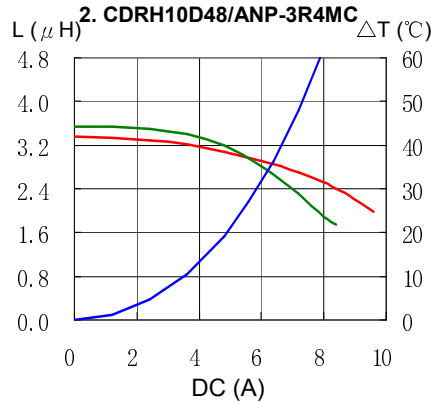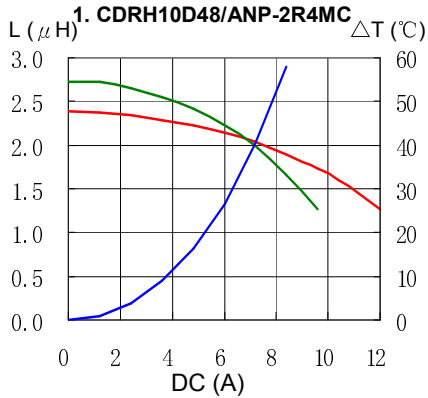






# SMD Power Inductor CDRH10D48/A



## Saturation Current & Temperature Rise Graph

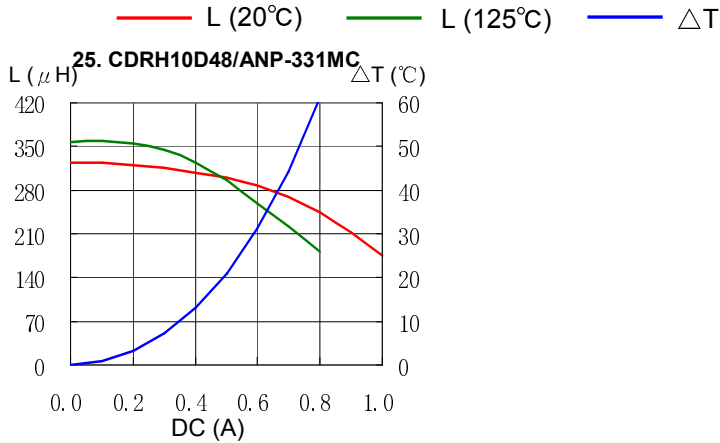

## Solder Reflow Condition

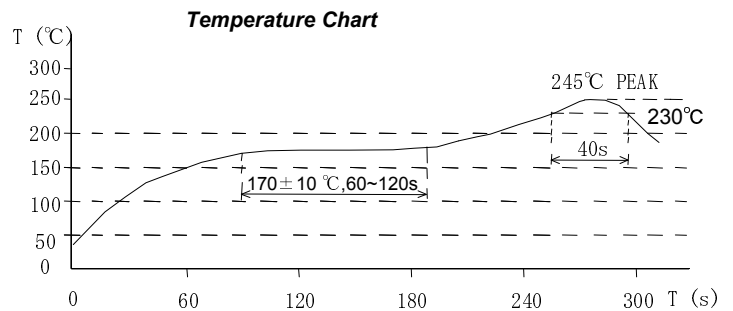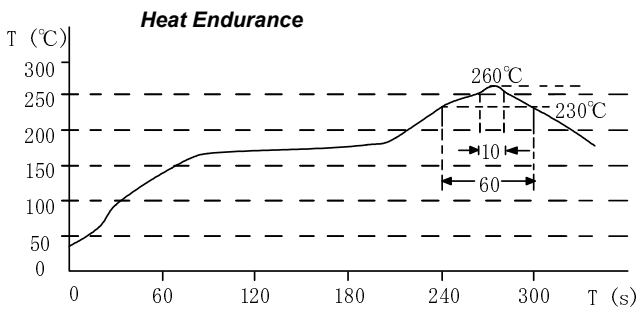

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel. +852-2880-6688  
FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel. +81-3-5202-7112  
FAX. +81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel. +1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel. +86-021-5836-3299  
FAX. +86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel. +82-2-6237-0777  
FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel. +49-8591-937-0  
FAX. +49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel. +86-755-8291-0228  
FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel. +65-6296-3388  
FAX. +65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel. +49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel. +886-2-8751-2737  
FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel. +1-408-3219660  
FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)